


LIQUIDTIGHT FLEXIBLE METAL CONDUIT (LFMC)

ELECTROTITE® LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT – INTERLOCKED TYPE EF - GENERAL CONSTRUCTION GRADE

- Galvanized steel core for lasting mechanical protection
- Excellent protection against impact, moisture, vapor and abrasion
- Bendable and high flexibility
- Coated with high grade PVC
- Suitable for industrial, commercial and residential applications
- Can be used both indoor and outdoor
- Easily cut to length on the job
- Accepts standard UL Listed liquid-tight connectors

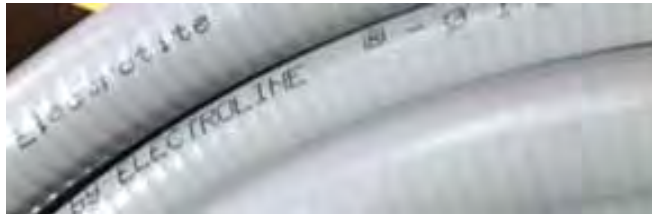

Catalog Number	Size (inch)	Inside Diameter				Outside Diameter				Bending Radius		Roll Length (ft)
		Min. (inch)	(mm)	Max. (inch)	(mm)	Min. (inch)	(mm)	Max. (inch)	(mm)	(inch)	(mm)	
E-EF-050	½	0.622	15.80	0.642	16.31	0.820	20.83	0.840	21.34	2	50	100
E-EF-075	¾	0.820	20.83	0.840	21.34	1.030	26.16	1.050	26.67	2-¾	65	100
E-EF-100	1	1.041	26.44	1.066	27.08	1.290	32.77	1.315	33.40	5	125	50
E-EF-125	1-¼	1.380	35.05	1.410	35.81	1.630	41.40	1.660	42.16	6	150	50
E-EF-150	1-½	1.575	40.00	1.600	40.64	1.865	47.37	1.900	48.26	7	175	25
E-EF-200	2	2.020	51.31	2.045	51.94	2.340	59.44	2.375	60.33	9	225	25
E-EF-250	2-½	2.480	62.99	2.505	63.63	2.840	72.14	2.875	73.03	11	275	25
E-EF-300	3	3.070	77.98	3.100	78.74	3.460	87.88	3.500	88.90	15-½	390	25
E-EF-350	3-½	3.500	88.90	3.540	89.92	3.960	100.58	4.000	101.60	18	450	25
E-EF-400	4	4.000	101.60	4.040	102.62	4.460	113.28	4.500	114.30	22	550	25